

SCT40WP 防水开合式电流互感器 SCT40WP waterproof open close current transformer


产品特点 Features

- ◆ 具有户外全密封防水功能，防水等级可达 IP67；适用于不断线、不拆线的条件下快速装卸，用于进行电量采集及对电量的监测；外壳采用抗 UV 材料，耐高温，耐腐蚀；体积小，外形美观，安装方便；线性好，精度高，线性范围宽，一致性好；内置开路保护装置，有效保护设备和人身安全。
- ◆ Equipped with outdoor fully sealed waterproof function, with a waterproof level of up to IP67; Applicable to rapid assemble and disassemble without broken or removing its connecting lead thread, used for the electric quantity collection and power monitoring; The shell is made of UV resistant material, which is resistant to high temperature and corrosion; Small in size and pleasant to eyes easy installation; Excellent linearity and isolation, high precision, wide in linearity range and overall consistency; Built in open circuit protection device, effectively protecting equipment and personal safety.


主要技术参数 Main parameters

型号 Model	额定输入/输出 Rated input/output	准确级 Accuracy	绝缘电阻 Insulation resistance	角差 Angle difference	负载电阻 Load resistance	隔离耐压 Isolated withstand voltage	穿线孔径 Threading aperture(mm)
SCT40WP-5k-500	500A/0.1A	0.5	≥100Mohm	≤60'	≤30Ω	3kVac	Φ40

产品规格 Specification (尺寸单位 Dimension unit: ±1mm)

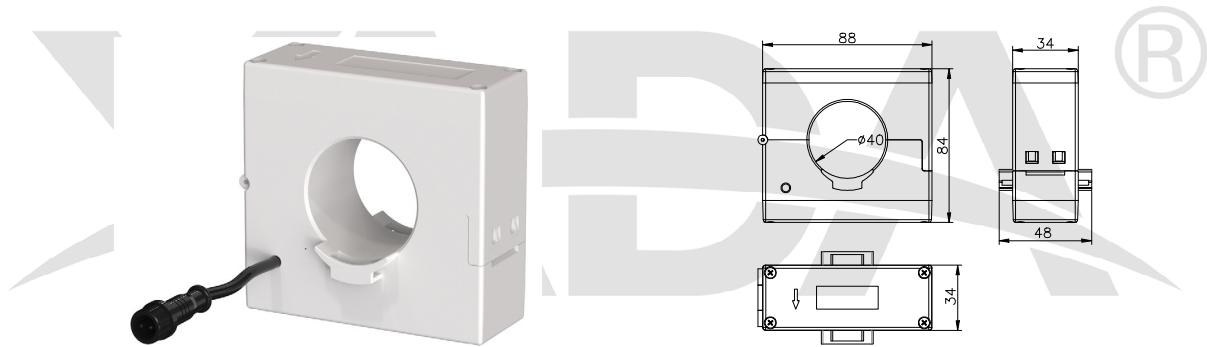

安装方式 Installation



将一次电流线穿过互感器，用扎带将互感器固定在一次电流线上。

The primary current line is passed through the transformer, and the transformer is fixed on the primary current line with a tie band.

说明 Note

- 使用温度 Operating temperature: -20℃~50℃； 贮存温度 Storage temperature: -40℃~75℃；
- 相对湿度 Relative humidity: 10%~95%RH；
- 上表所列为常用规格，还可根据客户要求另行设计。The products are customized according to user's requirements.

注：以上图片仅供参考，产品以实物为准，

Note: The above pictures are for reference only, the products are subject to the actual product, 版权所有，保留一切权利。内容如有改动，恕不另行通知。

Copyright, all rights reserved. Specification subject to change without prior notice.