

## YDBH0.66-40I-B 低压电流互感器 (电力用)

### YDBH0.66-40I-B Low voltage current transformer(the electric power uses)

#### 产品特点 Features

- 一次电流 50A~1000A, 二次电流 5A、1A、0.5A, 规格齐全, 全面覆盖 0.2、0.2S、0.5、0.5S、1.0 五个准确度等级。The primary current is 50A~1000A, while the secondary current is 0.5A, 1A, 5A. The products line covers accuracy of 0.2、0.2S、0.5、0.5S、1.0.
- 所用铁芯经过高真空热处理, 性能优良, 精度稳定。Vacuum-heat treatment for the iron core achieves excellent performance and stable precision.
- 外壳采用高抗冲阻燃 PC 材料制成, 具有良好的安全性能, 造型美观。The outer case is made of PC materials which is non-flammable. the performance is reliable and the product is safe for use.
- 采用翻盖式透明端子盖, 接线方便。Adopting a flip type transparent terminal cover for convenient wiring.
- 安装方便, 可采用弯片固定, 压盘固定。Easy installation; Fixed by metal slice or Platen.
- 性能符合 GB20840.2-2014 《电流互感器》技术标准。The performance meets the standard of GB 20840.2-2014 "Current Transformer".


#### 注意事项 Matters needing attention

- 使用于额定电压不超过 0.66kV 的交流电路, 长期工作电流不超过额定值。The use does not surpass 0.66kV in the rated voltage the AC-circuit, the long lasting work electric current does not surpass the rated value.
- 产品为减极性, 一次接线标志 P1、P2, 相应二次接线标志 S1、S2。The product is a minus polarity, The first connection wiring symbol is P1、P2, the corresponding secondary current wiring symbol is S1、S2.
- 测量仪表接于 S1、S2 端子上, 互感器二次绕组外部回路所接仪表的总阻抗 (包括接线) 不应超过其额定负荷。Measuring instruments connected to S1、S2 terminals, two times windings outside return route metering equipment total impedance (including wiring) should not be super high rated load.
- 电流互感器在运行中严禁二次开路。The current transformer refuses in the movement two times separation.
- 为了保证测量精度, 铜排需居中安装。In order to ensure the measurement accuracy, the copper bar should be installed in the middle.


#### 产品规格及技术参数 Specification And Technical parameter

型号 Model	参数(A) Parameter (A)	额定负荷(VA) Rated load (VA)	准确级 Accuracy	截面 Section
YDBH0.66-40I-B	75/5~1000/5	1.5VA~15VA	0.2、0.2S、0.5、0.5S、1.0	40×10mm <sup>2</sup>
	50/1~1000/1	0.2VA~10VA	0.2、0.2S、0.5、0.5S	
	400/0.5~600/0.5	1.5VA	0.5	
	300/0.3~450/0.3	0.5VA	0.2、0.5	
	600/0.4	0.8VA	0.2、0.5	
	50A/10mA~400A/80mA	20Ω	0.2、0.5	
	200A/10mA~600A/10mA	30Ω	0.2、0.5	

产品结构/尺寸单位: mm, 公差: ±1 External Dimensions/Dimension unit: mm, Tolerance: ±1



#### 安装方式 Installation

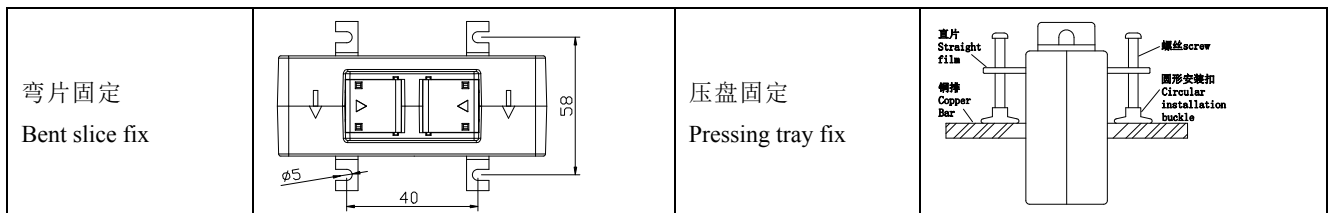

注: 以上图片仅供参考, 产品以实物为准,

Note: The above pictures are for reference only, the products are subject to the actual product, 版权所有, 保留一切权利。内容如有改动, 恕不另行通知。

Copyright, all rights reserved. Specification subject to change without prior notice.